

MAG44 LED



Marine-Grade Aluminium Bulkhead



35W

4,854
lumens

50W

6,749
lumens

Hello **Heavy-Duty!**

The MAG44 LED is a robust marine-grade aluminium bulkhead designed to perform in the toughest conditions. It features a high thermal shock-resistant borosilicate glass lens that withstands high-pressure hose-downs, making it ideal for heavy industrial and washdown areas.



Equipped with four external mounting lugs and a hinged aluminium frame, the MAG44 LED ensures quick installation and easy maintenance in environments where reliability is non-negotiable.



Fit-For-Purpose:


- Industrial Lighting
- Outdoor Lighting
- Security Lighting
- Conveyors
- Dusty & Dirty Environments
- Tunnel Lighting
- Zone 2, 21 & 22
- Plant Lighting

Description	Length (L)	Width (W)	Height (H)
MAG44 LED	414mm	300mm	151mm

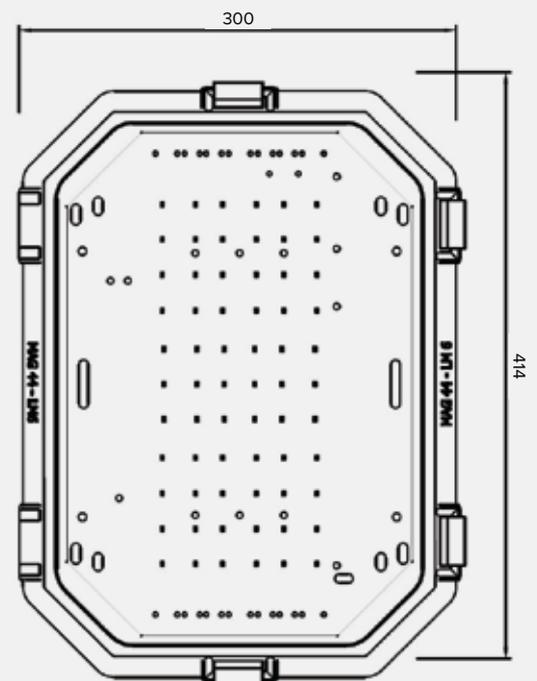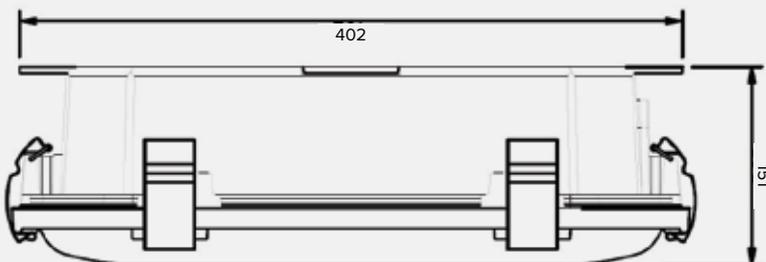


IES ROAD REPORT
PHOTOMETRIC FILENAME : MAG 44-MURP2 132 LED .IES

POLAR GRAPH

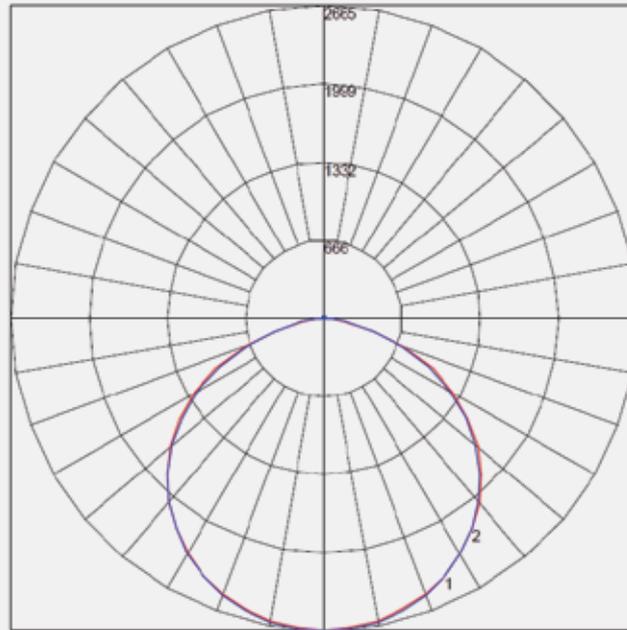

Maximum Candela = 2664.908 Located At Horizontal Angle = 90, Vertical Angle = 5
#1 - Vertical Plane Through Horizontal Angles (0-180)
#2 - Vertical Plane Through Horizontal Angles (90-270)

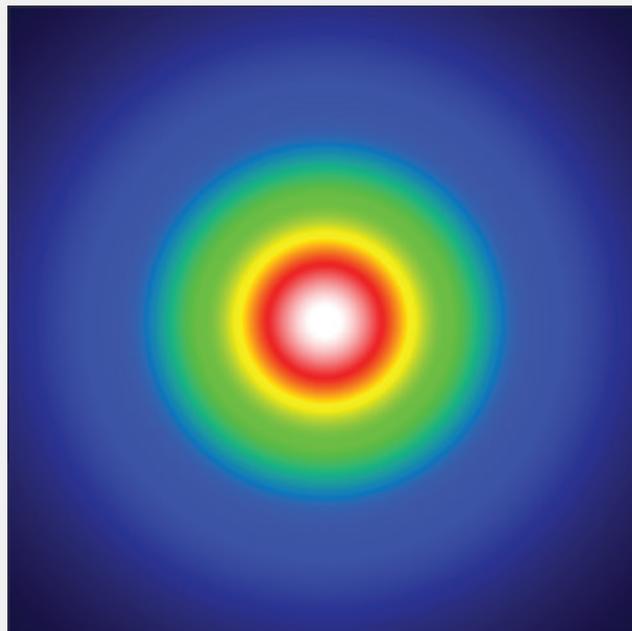

FEATURE	M44 0333	M44 0555
NOMINAL POWER	35 Watts	50 Watts
LUMINOUS FLUX (LM)	UP TO 4,854	UP TO 6,749
LUMINOUS EFFECIENCY (LM/W)	UP TO 148,5	UP TO 146,6
NUMBER OF LEDS	132	132
COLOR TEMPERATURE	4000K (STANDARD) 2200K / 3000K / 5000K / 6500K (OPTIONAL)	
LED LIFETIME (HOURS) @ TA 25 °C	L90B10 > 100 000 HRS	
CRI	>70	
DIFFUSER	GLASS	
NOMINAL INPUT VOLTAGE	220V - 240V	
OPERATING TEMPERATURE	-25°C to 50°C	
SURGE PROTECTION	10kV (Standard) 20kV (Optional)	
IP RATING	IP66	
OPTIONAL EXTRAS	30°, 60°, 90°, OVAL, ASYMMETRIC	
GROSS WEIGHT	5KG	

* Values shown are AFTER both Thermal and Optical losses. Output will vary depending on optics utilised. Performance values are subject to ±5% variance.

Emergency Options

FEATURE	M44 0333	M44 0555
OUTPUT POWER	5W (STANDARD) 20W / 40W (OPTIONAL)	
EMERGENCY DURATION	>1 HR (Max Ta 40°C)	

Mounting Options

SUFFIX	ACCESSORY
AV	Anti Vibration Mounting
PM	Pole Mounting
WM	Wall Mounting
RG	Remote Gear Mounting
CA	Cross Arm Mounting
EB	Eyebolt Mounting

Related Products



MAG22 LED



MAG40 LED



MAG45 LED



+27 11 614 4327



lighting@ilangalighting.co.za



www.ilangalighting.co.za



24 Julbert Road, Benrose,
Johannesburg, 2094

A LIGHTING SOLUTION FOR **EVERY** APPLICATION!

ILANGA LIGHTING DISTRIBUTION COMPANY (PTY) LTD - REG 2003/030689/07

B-BBEE
LEVEL **2**
CONTRIBUTOR

SABS
ISO 9001