

ILANGALED


LED Streetlight

 **5 YEAR**
Warranty



Engineered with LM6 die-cast aluminium and internal surge protection, the iLangaLED delivers optimal illumination for public roads, parking areas, and security zones.

Its efficient light distribution and compact design make it a smart choice for Class B roadways and high-usage outdoor environments.

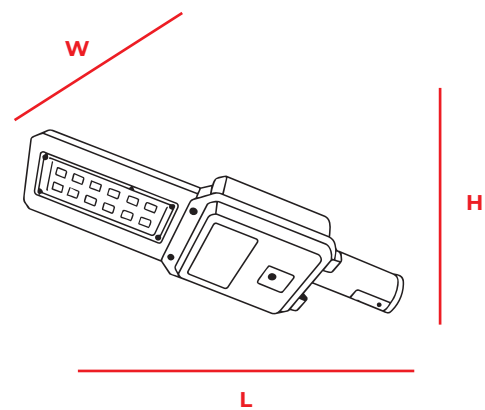

Product Code	SEL0020	SEL0030	SEL0040	SEL0050	SEL0060
Nominal Power	20W	30W	40W	50W	60W
Nominal Flux (lm)	Up to 2801 lm	Up to 4252 lm	Up to 5755 lm	Up to 6280 lm	Up to 6848 lm
Nominal Efficacy (lm/w)	142 lm/w	138 lm/w	133 lm/w	123 lm/w	112 lm/w
Colour Temperature	4000K (Standard) 2200K / 3000K / 5000K / 6500K (Optional)				
CRI	>70				
Surge Protection	10kV (Standard) 20kV (Optional)				
Diffuser	Polycarbonate - IK10				
Body	Aluminium				
Mounting	Spigot fitted Side entry insert (42mm Diameter)				
Colour	Grey				
Nominal Input Voltage	220V-230V (STANDARD) 90V-305V (OPTIONAL)				
IP Rating	IP66				
Product Size (L) x (W) x (H)	90mm x 27mm x 70mm	110mm x 28mm x 90mm	140mm x 28mm x 120mm	170mm x 28mm x 150mm	250mm x 30mm x 218mm
Product Weight	1.3kg				