


BLOWFISH LED

Linear Hi-Bay


 **5 YEAR**
Warranty

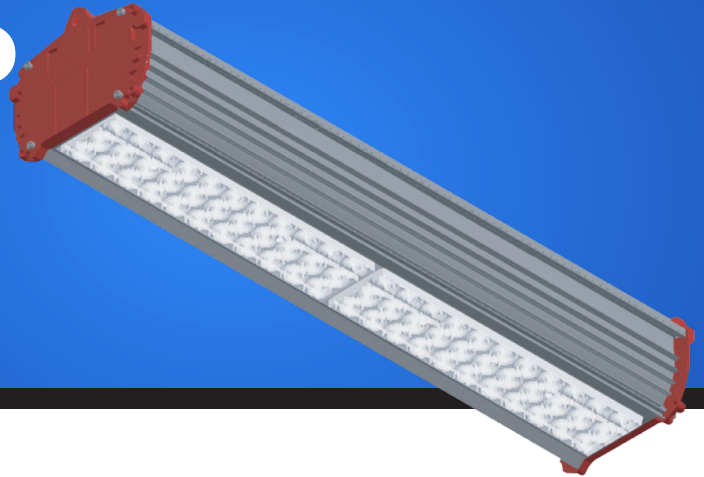

The Blowfish range delivers ultra-high lumen output with precision optics for various mounting heights.

Designed for industrial performance, it offers flexible installation, energy efficiency, and durability in one complete solution.

Ideal for warehouses, factories, and facilities where safety, brightness, and long-term reliability are critical.

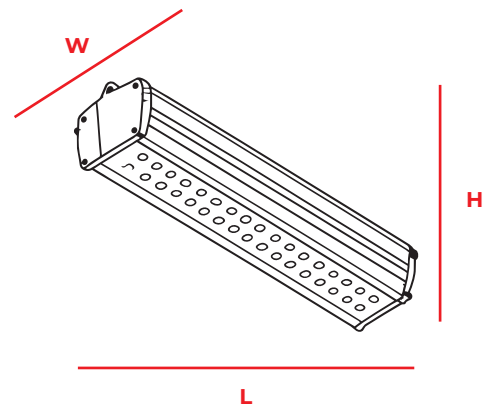

Product Code	HL-L01-025	HL-L-02-050	HL-L-04-100	HL-L-04-150	HL-H-03-200	HL-H-05-290	HL-H-23-400	HL-H-33-600
Nominal Power	25W	50W	100W	150W	200W	290W	400W	600W
Nominal Flux (lm)	3210 lm	6421 lm	12842 lm	17625 lm	28133 lm	46888 lm	56265 lm	84398 lm
Nominal Efficacy (lm/w)	128 lm/w	128 lm/w	128 lm/w	117 lm/w	141 lm/w	163 lm/w	141 lm/w	141 lm/w
Colour Temperature	4000K (Standard) 3000K / 5000K / 6500K (Optional)							
CRI	>70							
Diffuser	Polycarbonate - IK10							
Body	Marine Grade Aluminium							
Mounting	Multiple Mounting Options							
Colour	Anodised Aluminium Body & Painted End Caps							
Nominal Input Voltage	198V - 264V (Standard)							
IP Rating	IP65							
Optics	30° / 60° / 90° / Asymmetrical / Symmetrical Forward Throw							
Mounting Height	4-8 m	4-8 m	4-8 m	4-12 m	12-25 m	12-25 m	25 m+	25 m+
Product Size (L) x (W) x (H)	300 x 144 x 92	600 x 144 x 92	1200 x 144 x 92	1200 x 144 x 92	900 x 144 x 92	1500 x 144 x 92	900 x 144 x 92	900 x 144 x 92